




# AGMS-2-1 Mini Powered Slide

## Built-In Air Cylinder

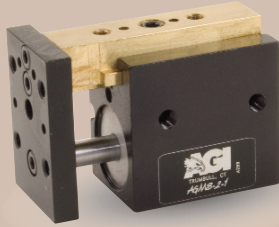

### FEATURES AND BENEFITS

- T-Slot bearing support for the carriage and end plate offers superior load bearing performance throughout the stroke.
- Standard built-in stroke adjustment and stroke lock for precise, repetitive operation.
- Compact, lightweight unit with built-in cylinder.
- Piston seals are U-CUP type for long service life.
- Hall Effect sensors are available to monitor stroke position.
- Multiple mounting surfaces on the body and endplate with threaded and counterbored holes for easy mounting choices.

### SPECIFICATIONS

**Design:** Built-in air cylinder  
T-slot slide

**Stroke:** 0.5 in [12.7 mm]

**Thrust Force @ 80 PSI [5.5 BAR]**

Extended: 35 lbs [155 N]  
Retract: 33 lbs [146 N]

**Recommended Speed:** 2-12 in/sec [0.5-.3m/sec]

**Pressure Range:** Low/High 20-120 PSI [1.4-8 BAR]

**Temperature Range:** Low/High -20°/150°F [-28°/80°C]

**Side Play:** ± 0.001 [.03 mm]

**Maximum Payload:** 7 lbs [3.2 kg]


**Material:** High Strength, Aluminum Alloys, Bronze

**Weight:** 4.2 oz [120 g]

**Piston Diameter:** .750 in [19 mm]

January 2009 - PATENTED Made in the USA

### MAXIMUM FORCES & MOMENTS

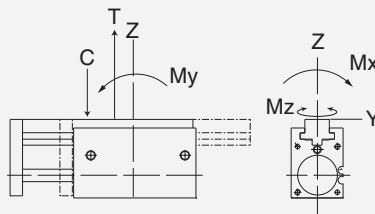

	Static	Dynamic
Max Tensile T	80 lbs [355 N]	34 lbs [151 N]
Max Compressive C	80 lbs [355 N]	34 lbs [151 N]
Max Moment $M_x$	35 in/lb [3.9 Nm]	19 in/lb [2.2 Nm]
Max Moment $M_y$	35 in/lb [3.9 Nm]	19 in/lb [2.2 Nm]
Max Moment $M_z$	35 in/lb [3.9 Nm]	19 in/lb [2.2 Nm]

### HOW TO ORDER

When ordering, please specify:  
Design/Model Number and Options.

**DESIGN/MODEL**  
AGMS-2-1  
AGMS-2-2  
AGMS-2-3  
AGMS-2-4

**METRIC**

**SENSOR TYPE**  
1 = NPN  
2 = PNP





**AGMS-2-1 M - 3 - 1 - 1**

**SENSOR OPTIONS\***  
1 = LEFT  
2 = RIGHT  
3 = BOTH

**SENSOR CONNECTOR**  
1 = POTTED  
2 = QUICK DISCONNECT  
3 = QUICK DISCONNECT WITH RIGHT ANGLE

\* NOTE: Hall Effect sensors are hard wired with 20" pigtail.

Sensor Part # SHN01, SHP01, SHNQ3, SHPQ3

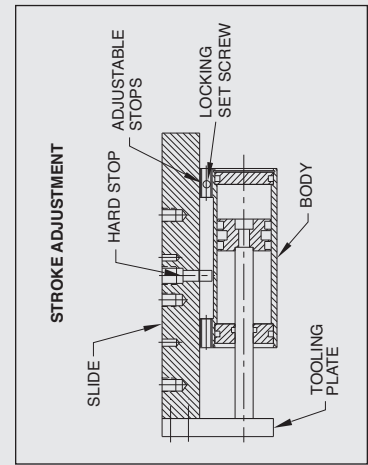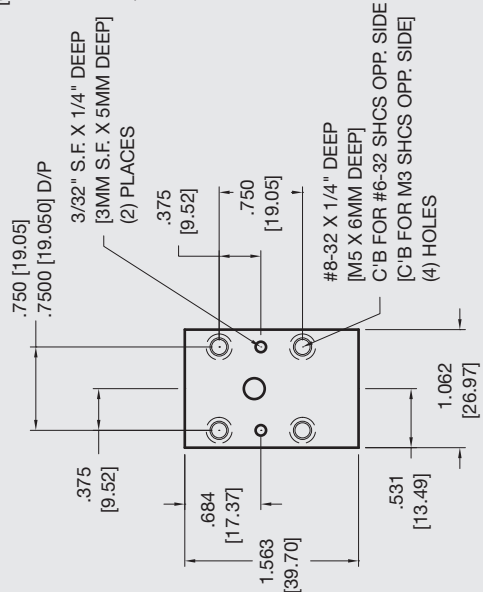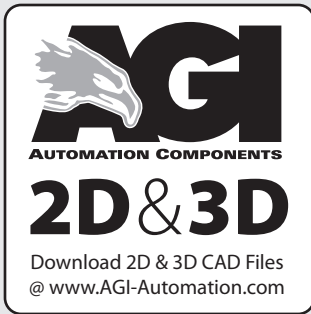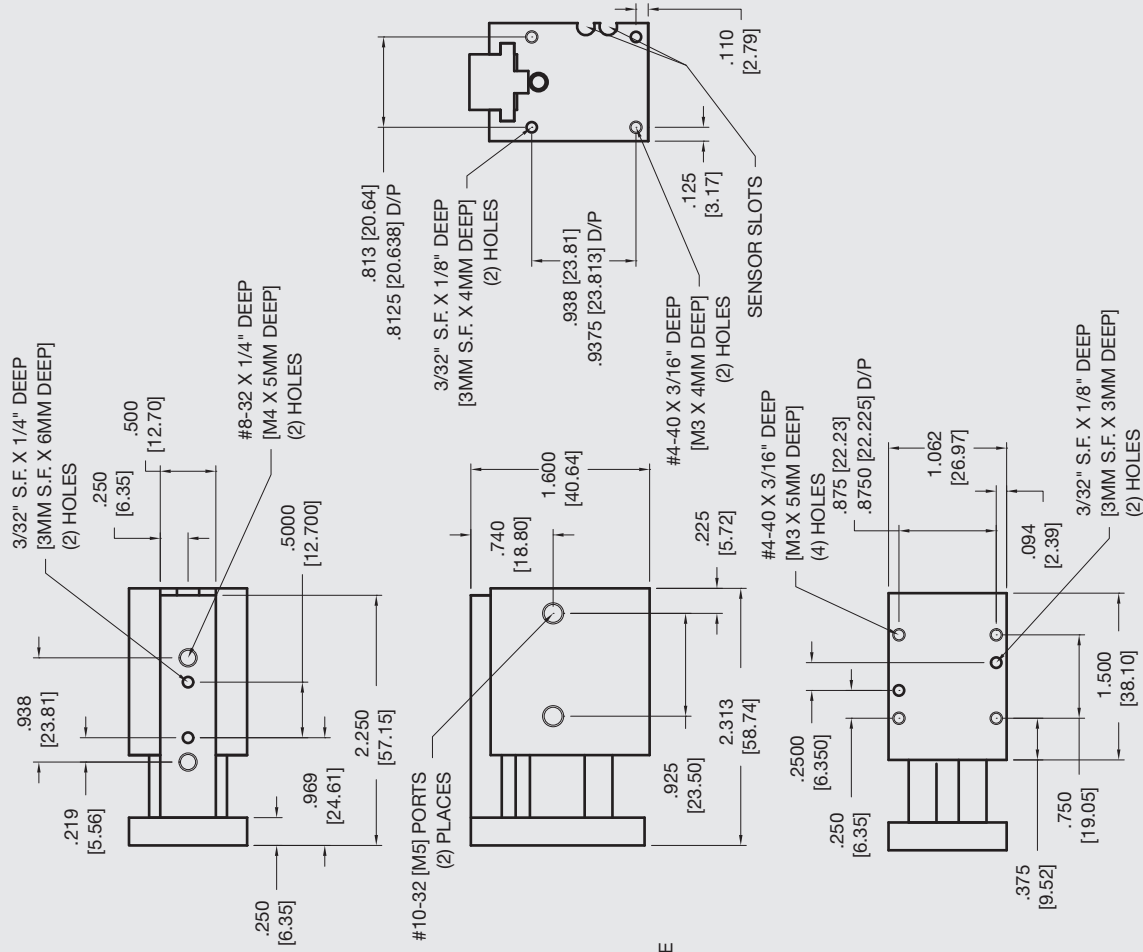

**Unless noted, all tolerances are as indicated here:**



All Dowel Holes are SF (Slip Fit) Locational Tolerance  $\pm .0005$  [0.13mm]



Metric Threads Course Pitch

Imperial: 0.00 =  $\pm .01$   
Inch 0.000 =  $\pm .005$   
0.0000 =  $\pm .0005$

Metric: [0.] =  $\pm .25$   
[mm] [0.0] =  $\pm .13$   
[0.00] =  $\pm .013$