



# AGPT-1125 Parallel Gripper

## T-Slot Bearing Series



### FEATURES AND BENEFITS

- Jaws are T-Slot bearing supported to prevent jaw breakage and offer superior load bearing performance.
- High gripping force to weight ratio.
- True parallel jaw motion for easy tooling.
- Units are permanently lubricated for non-lube air operation, allowing for compliance with OSHA regulations.
- Proximity switches are available to monitor open and closed position of the jaws.
- AGPT is fully field repairable for cost savings and minimum down time.
- Linkage is guided in the body for precise center repeatability.

### SPECIFICATIONS

**Design:** Parallel, Double Acting, Synchronized Jaws

**Stroke:** 1.125 in [28.6 mm]

**Gripping Force Per Jaw @ 80 PSI [5.5 BAR]**

Closing: 30 PSI [133 N]

Opening: 27 PSI [120 N]

**Time:**

Close: 0.20 sec [0.20 sec]

Open: 0.20 sec [0.20 sec]

**Pressure Range:**

Low/High 10-120 PSI [7-8 BAR]

**Temperature Range:**

Low/High -20°/180°F [-28°/80°C]


**Side Play:** ± 0.001 [.03 mm]

**Repeatability from Center:** ± 0.001 [.03 mm]

**Loading Capacity:**


	Static	Dynamic
Max Tensile T	100 lbs [444 N]	30 lbs [133 N]
Max Compressive C	100 lbs [444 N]	30 lbs [133 N]
Max Moment $M_x$	200 in/lb [22.6 Nm]	25 in/lb [5.6 Nm]
Max Moment $M_y$	250 in/lb [28 Nm]	30 in/lb [6.7 Nm]
Max Moment $M_z$	200 in/lb [22.6 Nm]	25 in/lb [5.6 Nm]

### HOLDING FORCES CHART

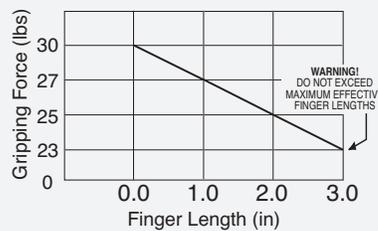

**WARNING!** Do not exceed tooling jaw length. See Chart above.


### LOADING INFORMATION

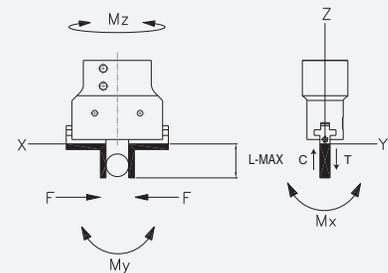

**LOOK!** More Technical specifications for sensors on "Sensors Accessories" page.


### HOW TO ORDER

When ordering, please specify:  
Design/Model Number and Options.

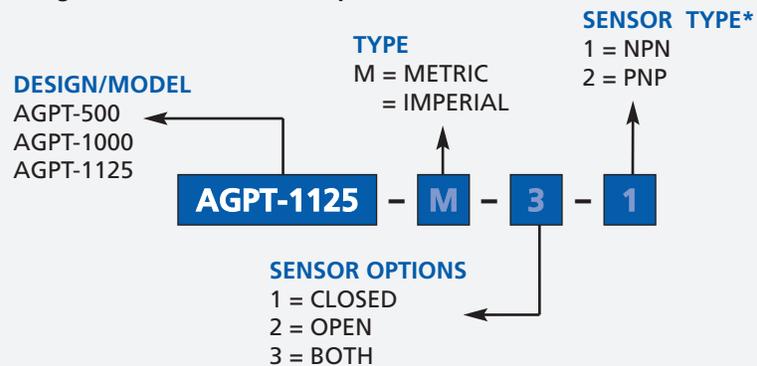

\* NOTE: Proximity 4mm dia., 5-24 VDC, 22 mA and comes with 2 meter cable.

Sensor Part # SNC04, SPC04

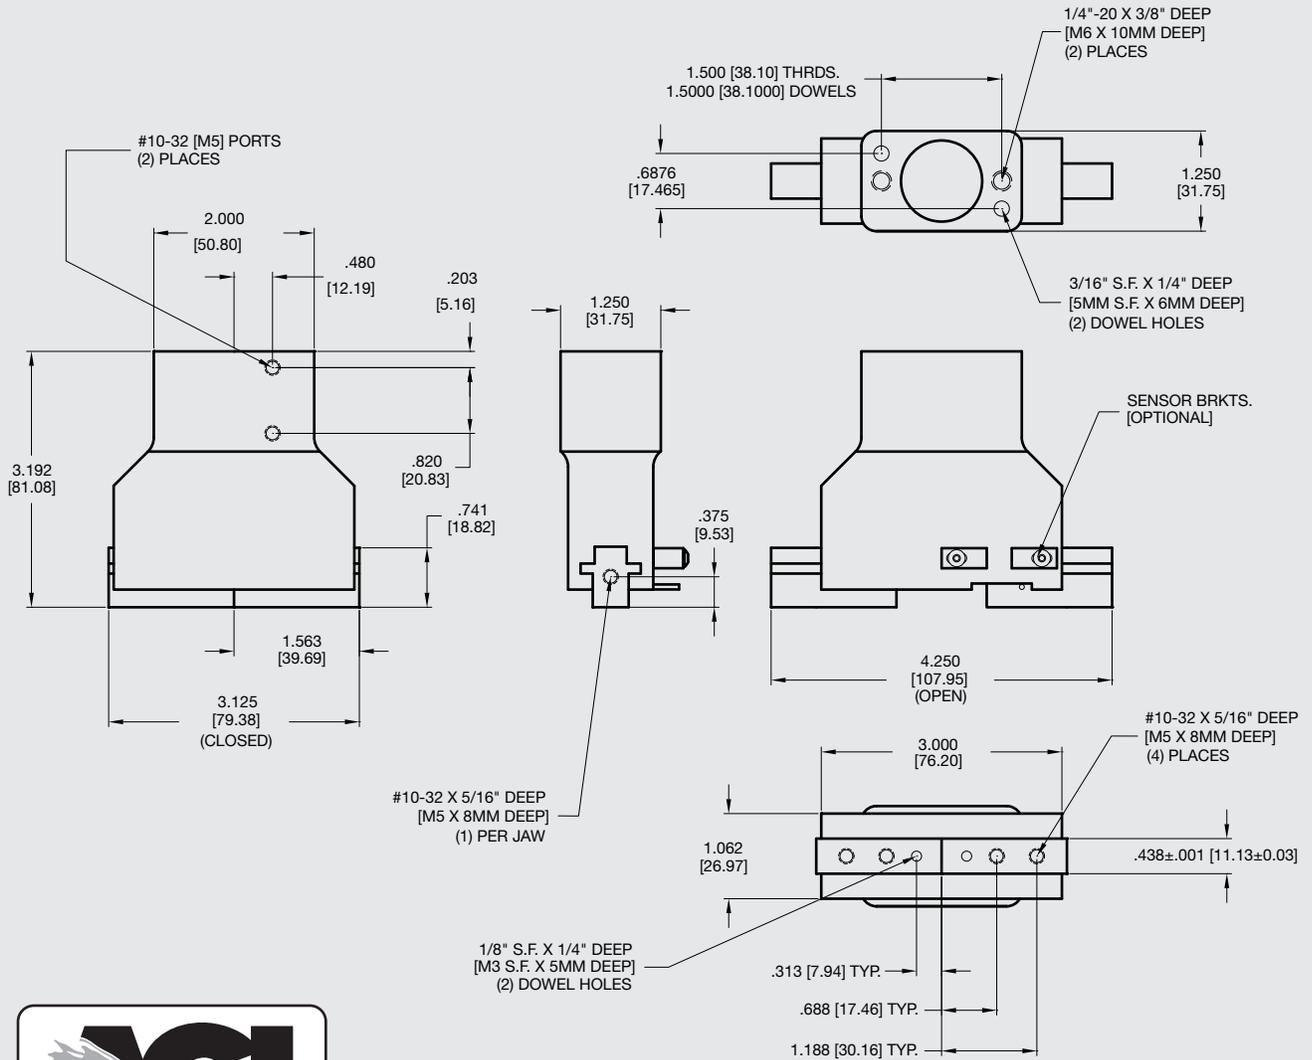

**Unless noted, all tolerances are as indicated here:**



All Dowel Holes are SF (Slip Fit) Locational Tolerance ± .0005" [0.13mm]



Metric Threads Course Pitch

**Imperial:**  
Inch 0.00 = ±.01  
0.000 = ±.005  
0.0000 = ±.0005

**Metric:**  
[0.] = ±.25  
[mm] [0.0] = ±.13  
[0.00] = ±.013